



**VIKING**  
ACCESS SYSTEMS™



**X-9™**


**UL** US  
LISTED 187C  
UL 325  
UL 991

residential and commercial  
**SWING GATE OPERATOR**  
Class I, Class II, Class III, and Class IV Vehicular Gate Operator

**800 CYCLES**  
in case of power failure\*




Built-in three push button station



Adjustable timer for automatic close

High efficiency power supply

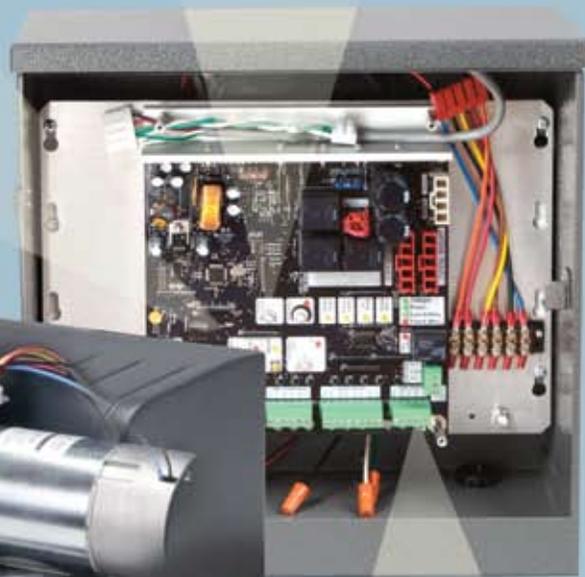

Built-in battery backup



Easy access to limit switch.



On-board lightning protection

**Operational Specifications**

Operation	24 VDC with 1/2 H.P. Motor
Main Power Source	120 / 220 VAC Single Phase
Battery	7 AmpHr 12 VDC x 2
Max Gate Weight	600 lbs.
Max Gate Length	14 Feet
Max Operating Speed	10-13 seconds per 90°
* Battery Backup Operation	800 Full Cycles (500 lbs. / 12' gate)
Max Duty Cycle	100%
Operating Temperature	-4°F to +158°F

The standard specifications and features of the X-9™ gate operator showcase the commitment made in its concept and design. Whether it's the simple, clean installation, energy efficient operation, or advanced battery backup function, this operator stands alone in its class. Included with the standard package are high quality direct burial cable, the complete control center and the X-9™ operator.

**WARRANTY**  
3 years residential  
2 years commercial



vikingaccess.com

**800.908.0884**