



9555/56 MAXIMUM **SECURITY** GATE OPERATOR

• MAXIMUM SECURITY

- User adjustable variable speed control
- Slow-start / slow-stop operation
- High tensile strength roller chain provides a direct mechanical linkage to the gate, will not slip and is unaffected by weather or other contaminants such as dirt, oil, grease, ice, etc.
- Integral internal direct driven limit switch system cannot be tampered with externally
- 5-year limited warranty



heavy-duty
10 ga steel housing option



solid-state
variable speed control



direct drive
limit switches




large gates
up to 10,000 pounds

ACCESS CONTROL **SOLUTIONS**

9555/56 MAXIMUM SECURITY OPERATOR

9555/56 5 HP

54" W x 59" H x 26" D (137.16cm W x 149.86cm H x 66.04cm D)

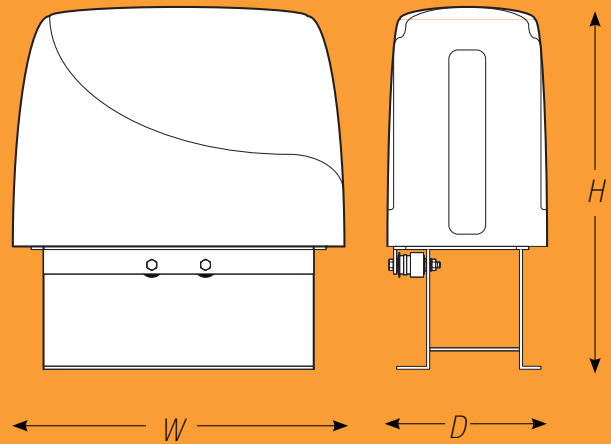

	CLASS OF OPERATION	MAX GATE LENGTH *	MAX GATE WEIGHT *	MOTOR	INPUT	GATE SPEED
9555 5 HP	III, IV	160 Ft (48.77 m)	10,000 Lbs. (4536 kg)	5 HP continuous duty AC motor	208 VAC / 3Ø, 15.9A 230 VAC / 3Ø, 15.8A 460 VAC / 3Ø, 7.9A	up to 4 Ft / Sec
9556 5 HP	III, IV	160 Ft (48.77 m)	10,000 Lbs. (4536 kg)	5 HP continuous duty AC motor	208 VAC / 1Ø, 15.9A 230 VAC / 1Ø, 15.8A	up to 4 Ft / Sec

* Assumes gate to be in good condition and swinging in a level plane.

Technical Features

Mechanical

3/8" Steel frame

1/4" polyethylene molded cover rated NEMA 4x

Primary Reduction is provided by heavy-duty 10:1 gear reducer running in a continuous oil bath.

Chain: includes 20' of #80 Roller chain

Brake: Spring-set, electrically released, self adjusting disc brake with manual release

Options

Heavy-duty 10 ga steel housing

Chain tray kit (p/n 2601-270) is available in 10-ft lengths and is recommended on gates exceeding 20-ft in length

Red/Green traffic signal provides a visual indication when the gate is safe & it is OK for traffic to proceed

Non-contact (photocells) and contact (sensing edges) entrapment prevention devices

Electrical

Adjustable speed 1 - 4 ft/sec

Slow start / slow stop

Adjustable partial open

Anti-tailgating

Selectable stop / reverse loop function

Direct driven limit switches

Built-in power switch

Built-in 3-button control (open-close-stop)

Warn-before-operate function

Built-in diagnostics check for specific fault conditions

Port for plug-in loop detectors (DKS Detectors only)

Two 115 VAC Convenience outlets

Optional Gate Tracker reporting provides operator data to a companion DKS access control system (models 1833, 1835, 1837 and 1838)

Miscellaneous

Environmental: 10°F to 140°F (-12°C to 62°C)

Thermostatically controlled heater kit recommended for colder environments

Shipping weight approximately 700-1200 Lbs (317-544 kg) Depending on model and options selected



Intertek

Safety

This vehicular slide gate operator is designed for Class III and IV applications only and should never be used in applications serving the general public such as apartment complexes, gated communities, residential applications, parking garages, etc.

External obstruction sensing devices must be used with these operators



Access Control Solutions since 1948

Distributed by:

MEMBER:



DOORKING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.

Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2013 All Rights Reserved. Product specifications may change without notice. Rev. 4/13