

HEADQUARTERS

ITALY
FAAC S.p.A. - Soc. Unipersonale
Via Calari 10 - 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
it.info@faacgroup.com - www.faacgroup.com

SUBSIDIARIES

ASIA - PACIFIC

FAAC MALAYSIA
MAGNETIC CONTROL SYSTEMS SDN BHD
Selangor, Malaysia
tel. +60 3 5123 0033
www.faac.biz

AUSTRALIA

FAAC AUSTRALIA PTY LTD
Homebush – Sydney, Australia
tel. +61 2 87565644
www.faac.com.au

AUSTRIA

FAAC GMBH
Salzburg, Austria
tel. +43 662 85333950
www.faac.at

FAAC BV - TUBULAR MOTORS
Doetinchem, The Netherlands
tel. +49 30 5679 6645
faacbv.info@faacgroup.com
www.faac-tubularmotors.com

BENELUX

FAAC BENELUX NV/SA
Jabbeke, Belgium
tel. +32 50 320202
info@faacbenelux.com
www.faacbenelux.com

FAAC BV
Doetinchem, The Netherlands
tel. +31 314 369911
faacbv.info@faacgroup.com
www.faacbv.com

BRAZIL

INDÚSTRIAS ROSSI ELETROMEÇÂNICA LTDA
Brasília DF, Brazil
tel. +55 61 33998787
www.rossiportoes.com.br

CHINA

FAAC SHANGHAI
Shanghai, China
tel. +86 21 68182970
www.faacgroup.cn

FRANCE

FAAC FRANCE
Saint Priest - Lyon, France
tel. +33 4 72213020
www.faac.fr

FAAC FRANCE - AGENCE PARIS
Massy - Paris, France
tel. +33 4 72213020
www.faac.fr

FAAC FRANCE - DEPARTEMENT VOLETS
Saint Denis de Pile - Bordeaux, France
tel. +33 5 57551890
www.faac.fr

GERMANY

FAAC GMBH
Freilassing, Germany
tel. +49 8654 49810
www.faac.de

FAAC BV - TUBULAR MOTORS
Doetinchem, The Netherlands
tel. +49 30 5679 6645
faacbv.info@faacgroup.com
www.faac-tubularmotors.com

INDIA

FAAC INDIA
MAGNETIC AUTOCONTROL PVT LTD.
Chennai – India
Tel. +91 44 421 23297
info@magnetic-india.com
www.faac.biz

IRELAND

NATIONAL AUTOMATION LTD
Co. Roscommon, Ireland
tel. +353 71 9663893
www.nal.ie

MIDDLE EAST

FAAC MIDDLE EAST FZE
Dubai Silicon Oasis Operation Center - Dubai, UAE
tel. + 971 4 3724190
www.faac.ae

FAAC INTERNATIONAL INC
Rockledge, FL - U.S.A.
tel. +1 866 925 3222
www.faacusa.com

POLAND

FAAC POLSKA SP.ZO.O
Warszawa, Poland
tel. +48 22 8141422
fax +48 22 8142024
www.faac.pl

RUSSIA

FAAC RUSSIA
Moscow, Russia
tel. +7 (495) 646 24 29
www.faac.ru

SCANDINAVIA

FAAC NORDIC AB
Perstorp, Sweden
tel. +46 435 779500
www.faac.se

SOUTH AFRICA

CENTURION SYSTEMS PTY LTD
2162 Johannesburg
tel. +27 11 699 2400
www.centsys.co.za

SPAIN

CLEM, S.A.U.
San Sebastián de los Reyes - Madrid, Spain
tel. +34 91 3581110
www.faac.es

SWITZERLAND

FAAC AG
Altendorf, Switzerland
tel. +41 41 8713440
www.faac.ch

TURKEY

FAAC OTOMATİK GEÇİŞ SİSTEMLERİ
SAN. VE TİC. LTD. SİRKETİ
İstanbul, Turkey
tel.+90 (0)212 - 3431311
www.faac.com.tr

UNITED KINGDOM

FAAC UK LTD.
Basingstoke Hampshire, UK
tel. +44 1256 318100
www.faac.co.uk

FAAC INTERNATIONAL INC
Fullerton, California - U.S.A.
tel. +1 714 446 9800
www.faacusa.com

9908363004 - Rev. 10 (07/2018) - 3.000 Zucchini (07/2018)

For an on-going product improvement, FAAC SpA reserves the right to make technical modifications without prior notice. All rights are reserved and the reproduction, in any form or by any means, of the whole or any part of this publication, is forbidden without prior permission of FAAC SpA.

C.D.



B614

BARRIER
24V ELECTROMECHANICAL

FAAC
Simply automatic.

FAAC
Simply automatic.


FAAC Creates Innovation

Modern design

Self-supporting polyester powder coated steel casing with distinctive V shape. A compact design, but with a large internal space for wiring and for housing any optional accessories.

Control board

The control board is conveniently located in the upper part, protected by a plastic cover that enhances the visibility of the LEDs. Intuitive programming via push buttons and display. Wide choice of operating logics and configurable parameters. Easy connection of safety devices.

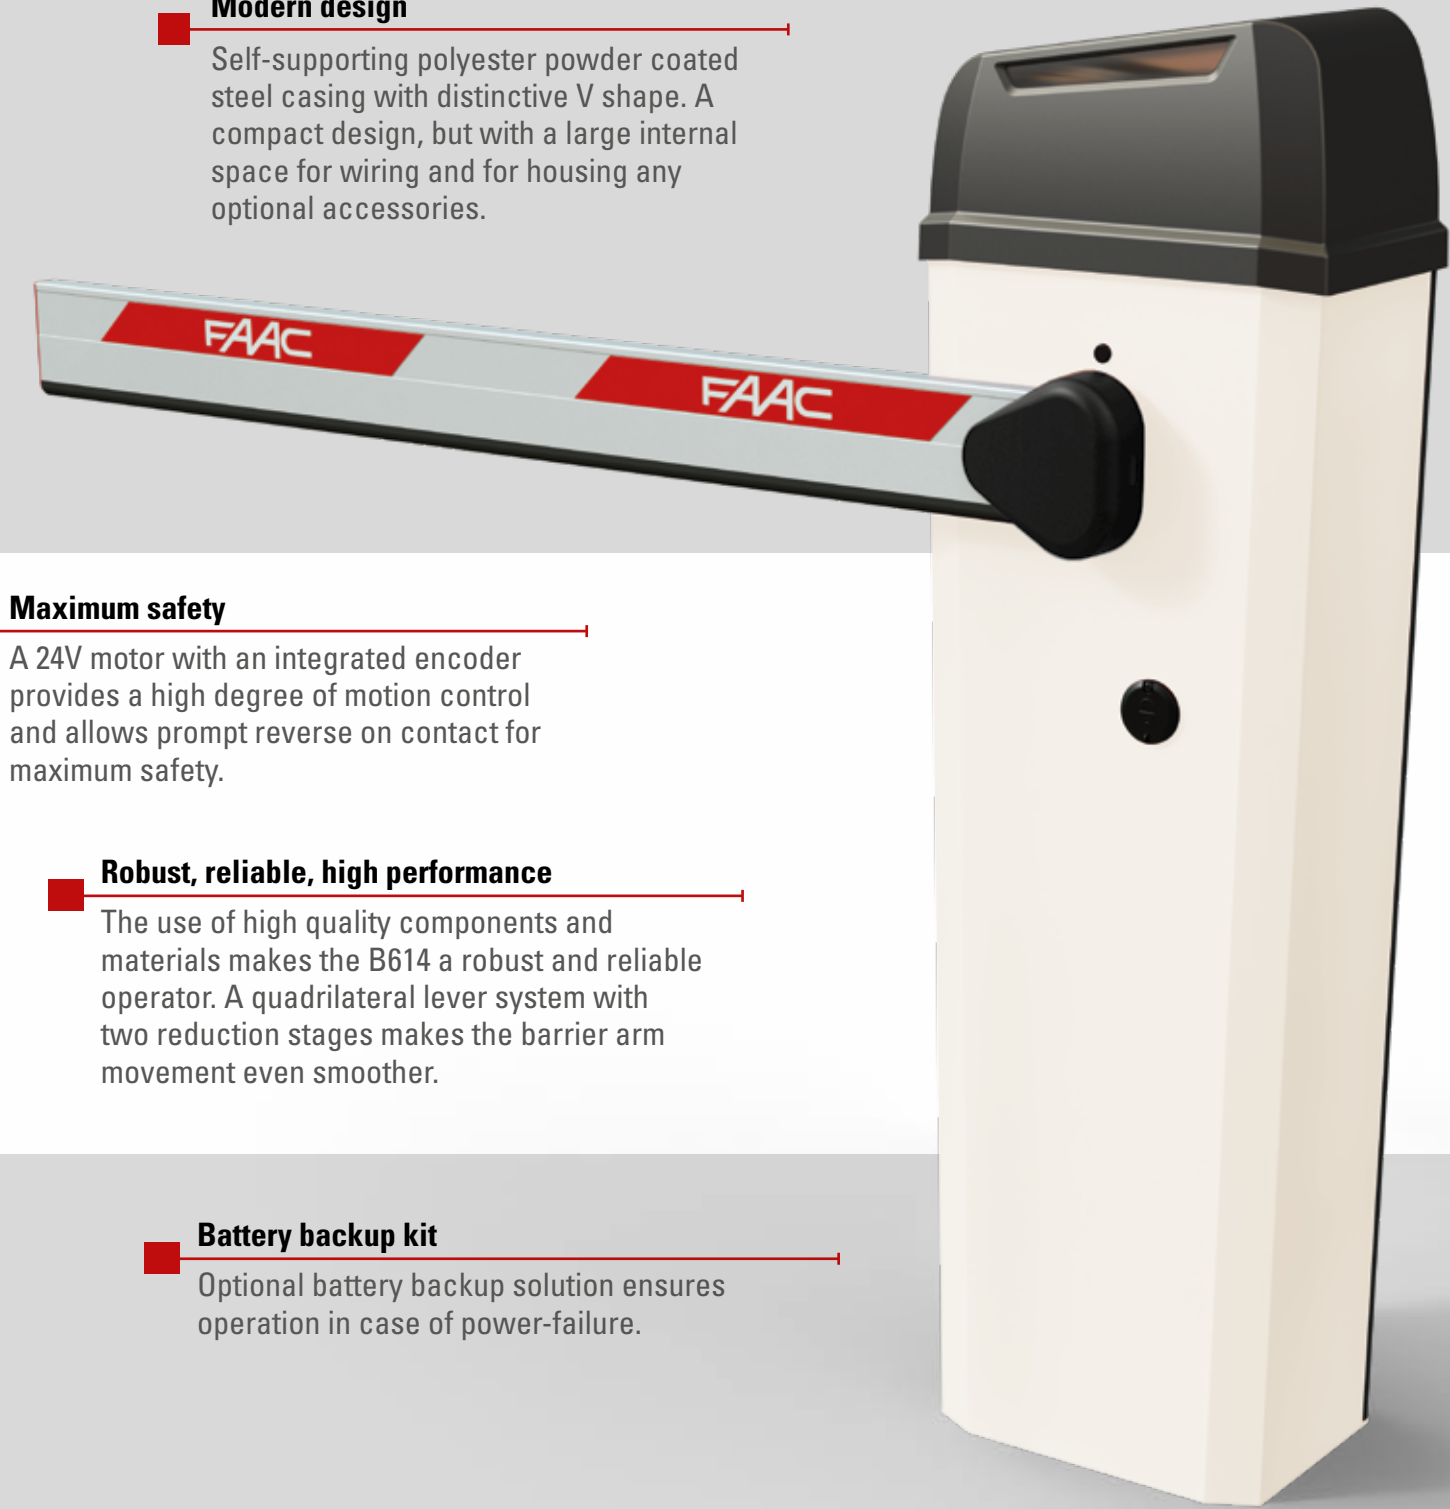

Maximum safety

A 24V motor with an integrated encoder provides a high degree of motion control and allows prompt reverse on contact for maximum safety.

Robust, reliable, high performance

The use of high quality components and materials makes the B614 a robust and reliable operator. A quadrilateral lever system with two reduction stages makes the barrier arm movement even smoother.

Battery backup kit

Optional battery backup solution ensures operation in case of power-failure.

Barrier arms

The rectangular barrier arms are fitted with a rubber anti-impact profile and optional LED lighting along the entire length of the arm.

Integrated flashing light

The flashing light is entirely integrated into the structure. The operation of its red and green high-efficiency LEDs can be easily programmed by the control board. (optional)

Complete range of accessories

Numerous accessories are available in order to personalize the product: arm lights and traffic light kit, skirt kit, articulated arm and pendulum support.

- Modern design
- Speed: 10ft in less than 2s
- Maximum safety: reverse on contact
- Easy to install



TECHNICAL CHARACTERISTICS

Power supply	115 Vac ±10% ~ 50/60 Hz
Electric motor	24V brushed
Max. power	165 W
Max. torque	300 Nm
Back-up batteries	Yes (optional)
Material	Steel
Surface treatment	Pre-hot dip galvanized, 20µm thick + polyester powder coated
Encoder	Incremental, integrated in the motor
Deceleration type	Electronic + mechanical
Beam type	Rectangular
Ambient operating temperature	-4°F to +131°F
Protection class	IP55 (Electronic control unit) - IP44
Weight	88 lb
Application	Residential/ light commercial-condominium

The B614 increases the performance of electromechanical barriers. A newly designed barrier, aimed at meeting a wide range of requirements, from residential to light commercial use.

